

Dati tecnici

Lubrificazione consigliata:
Olio per utensili pneumatici

Applicazioni:
Sostegni, fabbricazione pallet/casse, travature, coperture, strutture, sotto pavimento.

Sistema di funzionamento:
Grilletto-Duo (azionamento sequenziale singolo / azionamento a contatto)

Caricamento

- 1.Sbloccare la chiusura per aprire porta e caricatore.
- 2.Regolare il livello del caricatore in modo che i chiodi siano allineati con la linea guida.
- 3.Caricare i chiodi dall'alto del caricatore dentro il sistema di alimentazione.
- 4.Chiudere il caricatore e assicurarsi che il chiavistello sia chiuso correttamente.

Technical data

Recommended lubrications:
Pneumatic tool oil

Applications & suitability:
Cedar & derwood siding, sub-flooring, boxes, crates and other wooden assemblies.


Actuating system:
Combi-Trigger (single sequential actuation / contact actuation)

Filling the magazine

- 1. Release latch to open the door and magazine.
- 2. Adjust the level of the magazine base so that the nails will feed in line with guides.
- 3. Load nails onto pivot in the magazine and full forward so that the nails are inserted into the feeder mechanism.
- 4. On closing the magazine ensure the latch is closed properly.



195MCN2550C1_CN2550_081015 IV



Manuale d'uso, manutezione e parti di ricambio Parte 2

Use, maintenance and spare parts manual Part.2

CN25.50

cod. 195MCN2550C1

Indice di modifica Upgrade number


C1

Misure impiegabili mm (inch) Usable lenghts mm (inch)	32÷50 (1-1/4"÷2")
Capacità caricatore n° punti Magazine capacity No. of fasteners	300÷350
Pressione d'esercizio bar (psi) Working pressure bar (psi)	5÷8 (70÷115)
Consumo aria litri/colpo a 7 bar Air consumption litres/shot at 7 bar	1,65
Peso kg Weight kg	2,00
Dimensioni (AxBxH) mm Dimensions mm	305x128x285
Pressione sonora Max A-Weighted surface impulse sound pressure level	87,1 dBA
Potenza sonora emessa Max A-Weighted impulse sound power level	99,4 dBA
Vibrazione Vibration	4,17 m/s²



omer s.p.a.

Via Foresto, 42 - 31058 SUSEGANA (TV) ITALY
Tel. 0438 455 318 Fax 0438 455 530
e-mail: omer@omer.it www.omer.it

Tipo di punto
Type of fastener

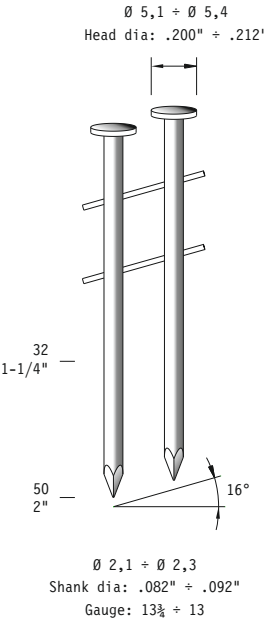

Dotazioni - Equipment

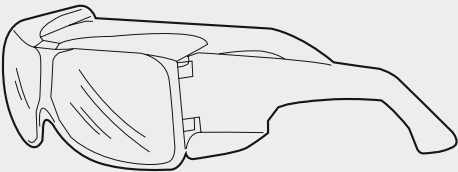

101	2MDB1564-A101	Deflector Bolt
102	2MDB1564-A102	Rubber Pad
103	2MCN2550-C103	Deflector
104	2MCN2970-A104	Hex. Soc. Hd. Bolt
105	2MCN2550-C105	Bolt
106	2MCN2550-C106	Cap
107	2MCN2357-A111	Washer Seal
108	2MCN2357-A112	Seal
109	2MM365-A110	Compression Spring
110	2MCN2357-A116	Washer
111	2MCN2550-C111	Hd. Valve Piston
112	2MCN2357-A115	O-Ring
113	2MCN2357-A114	O-Ring
114	2MCN3165-A117	O-Ring
115	2MCN2550-C115	Driver Unit
116	2MCN2357-A121	Collar
117	2MCN2550-C117	Cylinder
118	2MCN3165-A120	O-Ring
119	2MCN2550-C119	Cylinder Spacer
120	2MCN3165-A122	O-Ring
121	2MCN3165-A123	Cylinder Ring
122	2MCN3165-A124	Bumper
123	2MCN3165-A116	Packing
201	2MCN2970-A201	O-Ring
202	2MCN2970-A202	Plunger Cap
203	2MCN2970-A203	O-Ring
204	2MCN3165-A205	O-Ring
205	2MCN2970-A205	Valve Plunger
206	2MCN3165-A206	O-Ring
207	2MCN2970-A207	Spring
208	2MCN2970-A208	O-Ring
209	2MCN2357-A209	Plunger
210	2MCN2970-A210	Trigger Valve Head
211	2MCN2970-A211	Pin
212	2MCN2550-C212	Cover Plunger
213	2MCN2970-A213	O-Ring
214	2MCN2970-A214	O-Ring
215	2MCN2550-A215	Trigger Unit
216	2MM365-A412	Spiral Pins
217	2MCN2550-C217	Spiral Pins
218	2MCN2550-A214	Spring
301	2MCN2550-C301	Gun Body Unit
302	2MCN2550-A302	End Cap
303	2MCN3165-A303	O-Ring
304	2MCN3165-A304	Dusty Cover
305	2MCN3165-A305	Air Plug
401	2MCN2550-C401	Nose Piece
402	2MCN3165-A402	O-Ring
403	2MCN2550-C403	Feed Piston
404	2MCN3165-A404	O-Ring
405	2MCN3165-A405	O-Ring
406	2MCN2565-A410	Pusher Spring A
407	2MCN3165-A408	Feed Bumper
408	2MCN3165-A409	Feed Piston Cap
409	2MCN3165-A410	C-Ring
410	2MCN3165-A458	O-Ring
411	2MCN2550-A411	Feed Finger
412	2MCN3165-A412	Feed Finger Spring
413	2MCN3165-A418	Pin Feed Piston
414	2MCN3165-A414	Pu Retainer
415	2MCN3165-A415	First Stopper Finger
416	2MCN3165-A416	Urethane Retainer
417	2MCN2550-A417	Spring
418	2MCN3165-A428	Hex. Soc. Hd. Bolt
419	2MCN2550-A419	Pin-Nail Stop
420	2MCN3165-A449	Door Shaft Pin
421	2MCN2550-C421	Door
422	2MCN3165-A422	Latch Spring
423	2MCN3165-A423	Door Latch
424	2MCN3165-A424	Spring Pin
425	2MCN3165-A432	Safety Guide
426	2MCN3165-A434	Safety Spring
427	2MCN2550-C427	Safety A Unit
428	2MCN3165-A431	Bolt Cap
429	2MCN2565-A404	Hex. Soc. Hd. Bolt
430	2MCN2550-A430	Safety Cover
431	2MCN2550-A454	Muzzle Protector
432	2MCN3165-A456	Fixed Pin
433	2MCN2550-A456	Fixed Ring
434	2MCN3165-A452	Flat Washer
435	2MCN3165-A451	Hex. Soc. Hd. Bolt
436	2MCN3165-A444	Spring Base A
437	2MCN2550-C437	Pull Spring
438	2MCN3165-A446	Spacer

