

Dati tecnici

Lubrificazione consigliata:
Olio per utensili pneumatici

Applicazioni:
Sostegni, fabbricazione pallet/casse, travature, coperture, strutture, sotto pavimento.

Sistema di funzionamento:
Grilletto-Duo (azionamento sequenziale singolo / azionamento a contatto)

Caricamento

- 1.Sbloccare la chiusura per aprire porta e caricatore.
- 2.Regolare il livello del caricatore in modo che i chiodi siano allineati con la linea guida.
- 3.Caricare i chiodi dall'alto del caricatore dentro il sistema di alimentazione.
- 4.Chiudere il caricatore e assicurarsi che il chiavistello sia chiuso correttamente.

Technical data

Recommended lubrications:
Pneumatic tool oil

Applications & suitability:
Cedar & derwood siding, sub-flooring, boxes, crates and other wooden assemblies.


Actuating system:
Combi-Trigger (single sequential actuation / contact actuation)

Filling the magazine

- 1. Release latch to open the door and magazine.
- 2. Adjust the level of the magazine base so that the nails will feed in line with guides.
- 3. Load nails onto pivot in the magazine and full forward so that the nails are inserted into the feeder mechanism.
- 4. On closing the magazine ensure the latch is closed properly.



195MCN2865_CN2865_211215 IV



Manuale d'uso, manutenzione
e parti di ricambio Parte 2
Use, maintenance
and spare parts manual Part.2

CN28.65

cod. 195MCN2865


Indice di modifica
Upgrade number

A1

Misure impiegabili mm (inch) Usable lenghts mm (inch)	32÷65 (1-1/4"÷2-9/16")
Capacità caricatore n° punti Magazine capacity No. of fasteners	300
Pressione d'esercizio bar (psi) Working pressure bar (psi)	5÷8 (70÷115)
Consumo aria litri/colpo a 7 bar Air consumption litres/shot at 7 bar	2,97
Peso kg Weight kg	2,05
Dimensioni (AxBxH) mm Dimensions mm	268x128x306
Pressione sonora Max A-Weighted surface impulse sound pressure level	85,2 dBA
Potenza sonora emessa Max A-Weighted impulse sound power level	98,2 dBA
Vibrazione Vibration	4,23 m/s²



omer s.p.a.
Via Foresto, 42 - 31058 SUSEGANA (TV) ITALY
Tel. 0438 455 318 Fax 0438 455 530
e-mail: omer@omer.it www.omer.it

Tipo di punto
Type of fastener

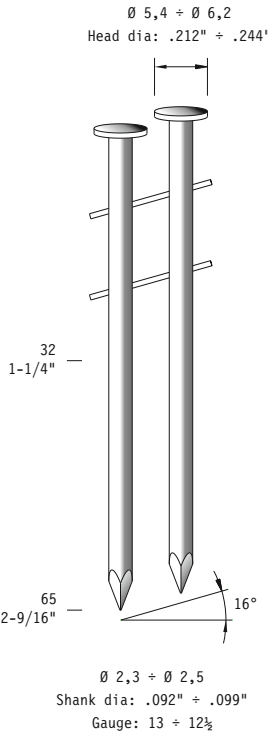


Ref. No.	Part No.	Description
----------	----------	-------------

101	2MCN3165-A101	Hex. Soc. Hd. Bolt
102	2MCN3165-A102	Washer
103	2MCN2865-A103	Deflector
104	2MCN3165-A104	Muffler
105	2MCN3165-A105	Rubber Pad
106	2MCN2865-A106	Cap
107	2MCN3165-A107	Hex. Soc. Hd. Bolt
108	2MCN3165-A108	Washer
109	2MCN3165-A109	Compression Spring
110	2MCN3165-A110	Hd.Valve Piston
111	2MCN3165-A111	O-Ring
112	2MCN3165-A112	O-Ring
113	2MCN3165-A113	Seal Gasket
114	2MCN3165-A114	Seal
115	2MCN3165-A115	Collar
116	2MCN3165-A116	Packing
117	2MCN3165-A117	O-Ring
118	2MCN2865-A118	Driver Unit
119	2MCN3165-A119	Cylinder
120	2MCN3165-A120	O-Ring
121	2MCN3165-A121	Cylinder Spacer
122	2MCN3165-A122	O-Ring
123	2MCN3165-A123	Cylinder Ring
124	2MCN3165-A124	Bumper
125	2MCN3165-A124	Cylinder Press Ring
126	2MCN3165-A124	Press Ring
200	2MCN3165-A200	Trigger Valve Unit
201	2MCN3165-A201	O-Ring
202	2MCN3165-A202	O-Ring
203	2MCN3165-A203	Plunger Cap
204	2MCN3165-A204	Valve Plunger
205	2MCN3165-A205	O-Ring
206	2MCN3165-A206	O-Ring
207	2MCN3165-A207	Spring
208	2MCN2550-A208	Plunger
209	2MCN3165-A209	O-Ring
210	2MCN3165-A210	Trigger Valve Head
211	2MCN3165-A211	Spring Pin
212	2MCN3165-A212	Spring Pin
213	2MCN3165-A213	Spring Pin
221	2MCN2550-A215	Trigger Unit
222	2MCN2550-A214	Spring
301	2MCN2865-A301	Gun Body Unit
302	2MCN3165-A302	End Cap
303	2MCN3165-A303	O-Ring
304	2MCN3165-A304	Dusty Cover
305	2MCN3165-A305	Air Plug
401	2MCN2865-A401	Nose Piece
402	2MCN3165-A402	O-Ring
403	2MCN3165-A403	Feed Piston
404	2MCN3165-A404	O-Ring
405	2MCN3165-A405	O-Ring
407	2MCN3165-A407	Spring A Compression
408	2MCN3165-A408	Feed Bumper
409	2MCN3165-A409	Feed Piston Cap
410	2MCN3165-A410	C-Ring
411	2MCN2865-A411	Feed Finger
412	2MCN3165-A412	Feed Finger Spring
414	2MCN3165-A414	Pu Retainer
415	2MCN3165-A415	First Stopper Finger
416	2MCN3165-A416	Urethane Retainer
417	2MCN2550-A417	Spring
418	2MCN3165-A418	Pin Feed Piston
419	2MCN2550-A419	Pin-Nail Stop
420	2MCN3165-A420	Door Shaft Pin
421	2MCN3165-A421	Door
422	2MCN3165-A422	Latch Spring
423	2MCN3165-A423	Door Latch
424	2MCN3165-A424	Spring Pin
425	2MCN3165-A425	Nail Stop
426	2MCN3165-A426	Stopper Finger Sprin
427	2MCN3165-A427	Pin-Nail Stop
428	2MCN3165-A428	Hex. Soc. Hd. Bolt
429	2MCN3165-A429	Hex. Soc. Hd. Bolt
430	2MCN3165-A430	Safety Cover
431	2MCN3165-A431	Bolt Cap
432	2MCN3165-A432	Safety Guide
433	2MCN3165-A433	Spring Pin
434	2MCN3165-A434	Safety Spring
435	2MCN2865-A435	Safety B Unit
436	2MCN3165-A436	Adjust Axie
437	2MCN3165-A437	Cover-Safety
438	2MCN3165-A438	Adjust Rod
439	2MCN3165-A439	O-Ring

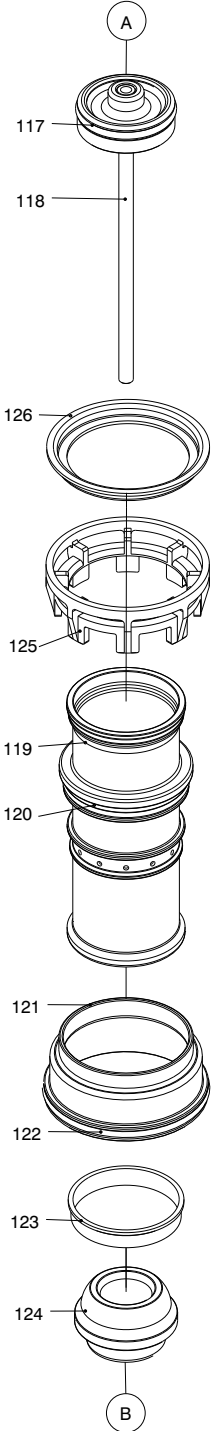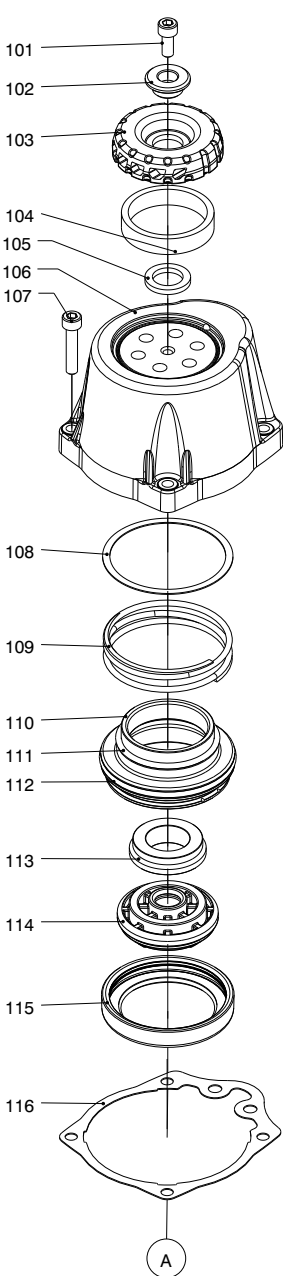

440	2MCN3165-A440	Safety A Unit
441	2MCN3165-A441	E-Ring
442	2MCN3165-A442	Protective Casing
443	2MCN3165-A443	Magazine Cover
444	2MCN3165-A444	Spring Base A
445	2MCN3165-A445	Pull Spring
446	2MCN3165-A446	Spacer
447	2MCN3165-A447	Magazine Case
448	2MCN3165-A448	Spring Base
449	2MCN3165-A449	Door Shaft Pin
450	2MCN3165-A450	Shaft Ring
451	2MCN3165-A451	Hex. Soc. Hd. Bolt
452	2MCN3165-A452	Flat Washer
454	2MCN3165-A454	Lock Nut
455	2MCN3165-A455	Muzzle Protector
456	2MCN3165-A456	Fixed Pin
457	2MCN2550-A456	Fixed Ring
458	2MCN3165-A458	O-Ring
459	2MCN3165-A459	Fix-Plate
460	2MCN3165-A460	O-Ring

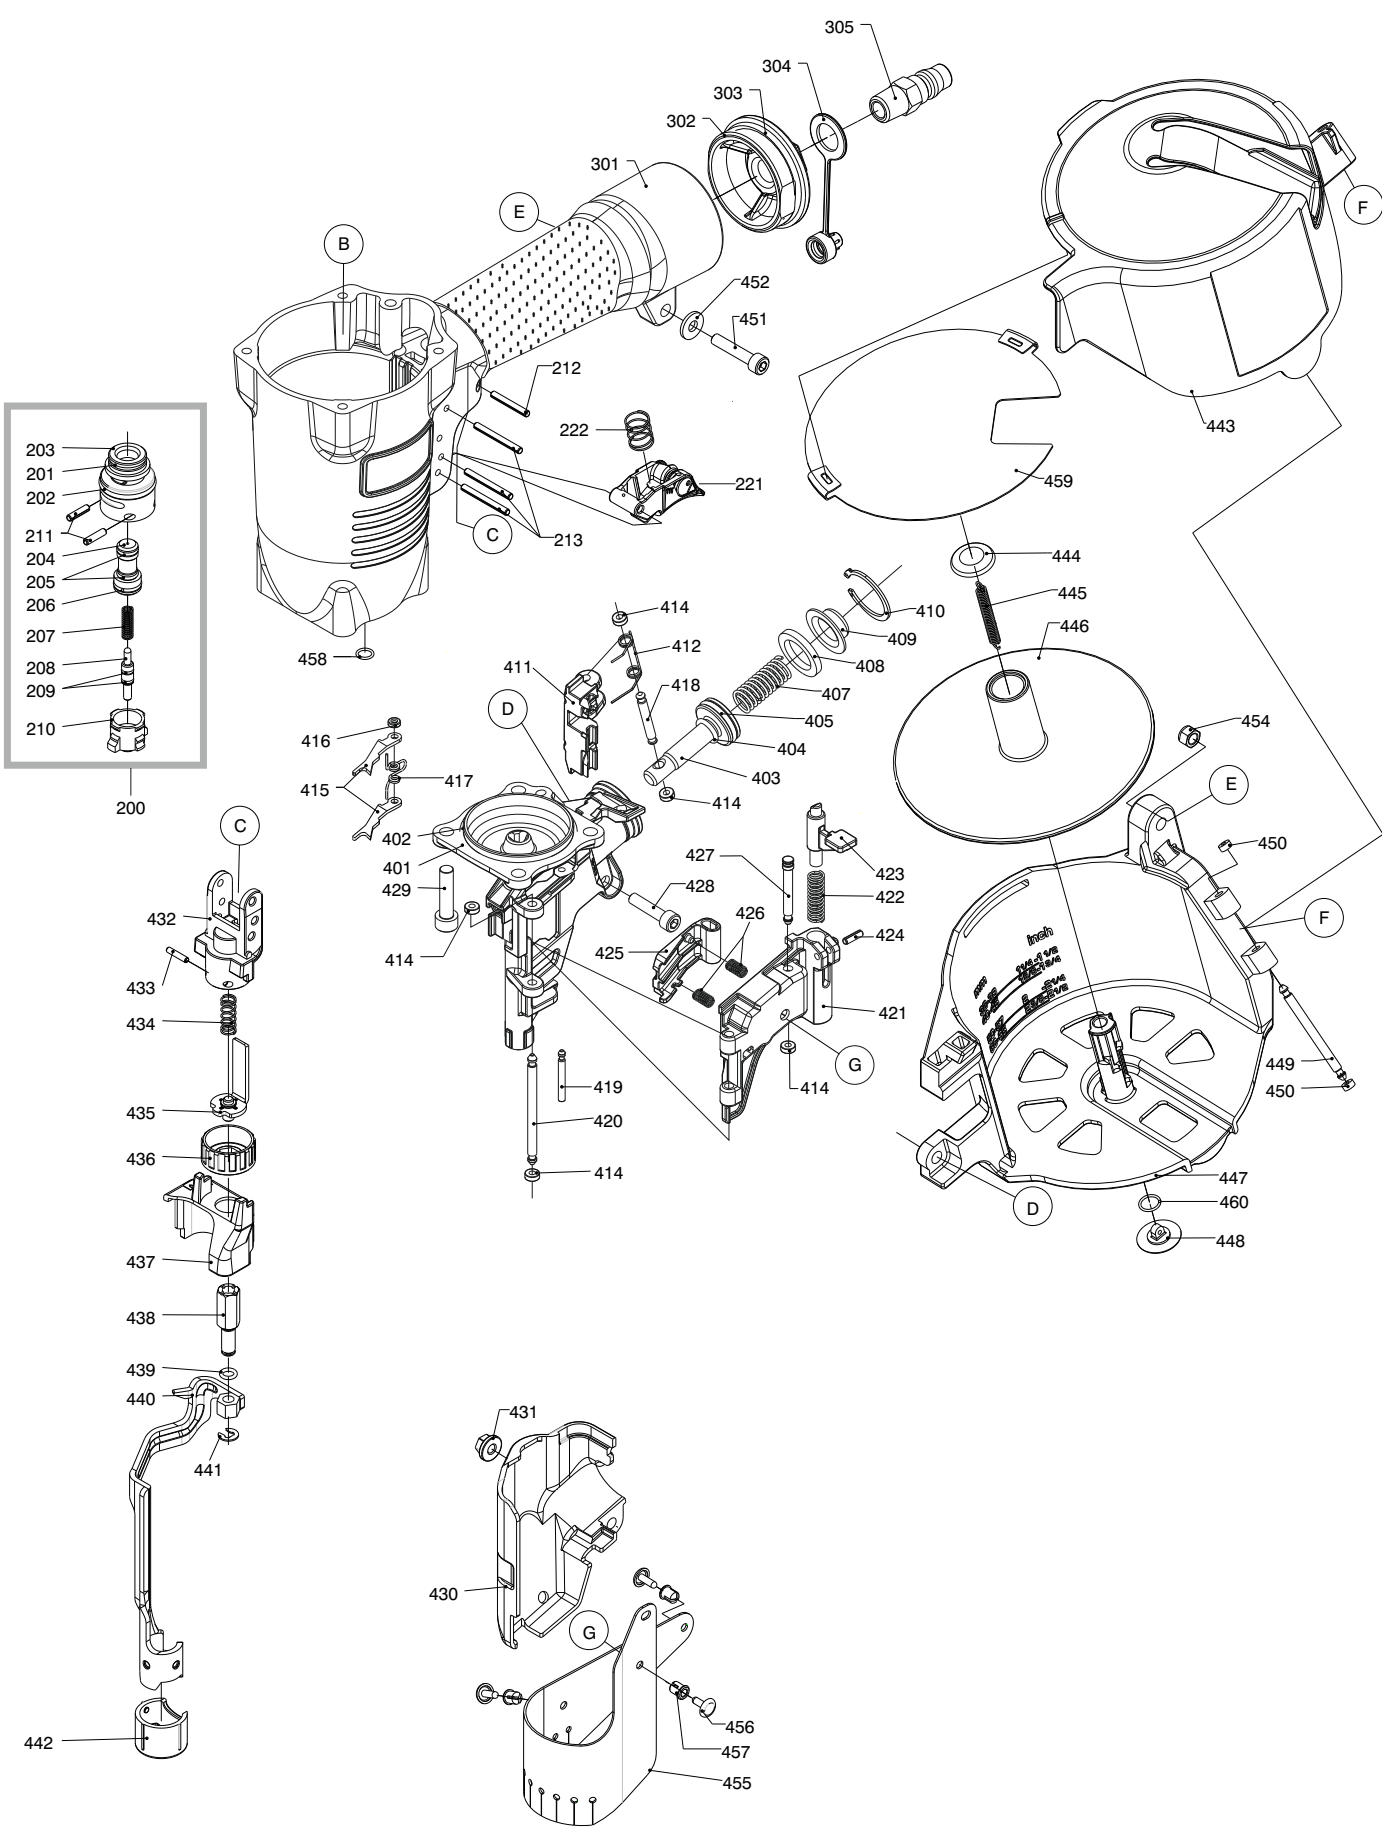

Parti di ricambio - Spare parts

CN28.65

cod. 195MCN2865

Indice di modifica
Upgrade number

A1

06120525