

Dati tecnici

Lubrificazione consigliata:
Olio per utensili pneumatici

Applicazioni:
Sostegni, fabbricazione pallet/casse, travature, coperture, strutture, sotto pavimento.

Sistema di funzionamento:
Funzionamento colpo singolo/bump (grilletto nero)
Funzionamento sequenziale (grilletto rosso)

Caricamento

- 1.Sbloccare la chiusura per aprire porta e caricatore.
- 2.Regolare il livello del caricatore in modo che i chiodi siano allineati con la linea guida.
- 3.Caricare i chiodi dall'alto del caricatore dentro il sistema di alimentazione.
- 4.Chiudere il caricatore e assicurarsi che il chiavistello sia chiuso correttamente.

Technical data

Recommended lubrications:
Pneumatic tool oil

Applications & suitability:
Cedar & derwood siding, sub-flooring, boxes, crates and other wooden assemblies.


Actuating system:
Single/bump actuation (black trigger)
Sequential actuation (red trigger)

Filling the magazine

- 1. Release latch to open the door and magazine.
- 2. Adjust the level of the magazine base so that the nails will feed in line with guides.
- 3. Load nails onto pivot in the magazine and full forward so that the nails are inserted into the feeder mechanism.
- 4. On closing the magazine ensure the latch is closed properly.



195MCN2970_CN2970_061015 IV



Manuale d'uso, manutezione e parti di ricambio Parte 2

Use, maintenance and spare parts manual Part.2

CN29.70


cod. 195MCN2970

Indice di modifica Upgrade number


A1

Accessori a richiesta - Upon request accessories

Supporto bilanciere
Tool hanger



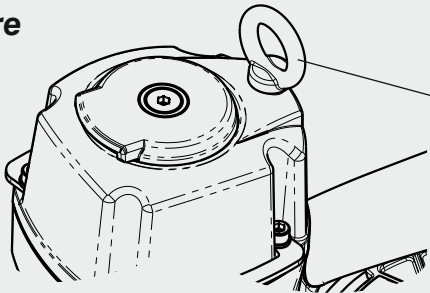


Kit grilletto sparo sequenziale
Sequential fire trigger kit



2MSN2213-K216

Dotazioni - Equipment

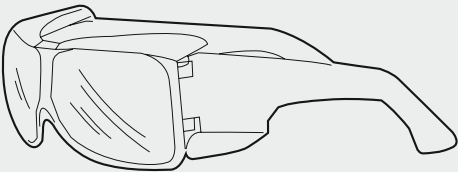


Misure impiegabili mm (inch) Usable lenghts mm (inch)	45÷70 (1-3/4"÷2-3/4")
Capacità caricatore n° punti Magazine capacity No. of fasteners	225÷300
Pressione d'esercizio bar (psi) Working pressure bar (psi)	5÷8 (70÷115)
Consumo aria litri/colpo a 7 bar Air consumption litres/shot at 7 bar	2,69
Peso kg Weight kg	3,60
Dimensioni (AxBxH) mm Dimensions mm	340x129x320
Pressione sonora Max A-Weighted surface impulse sound pressure level	92,1 dBA
Potenza sonora emessa Max A-Weighted impulse sound power level	104,4 dBA
Vibrazione Vibration	3,8 m/s ²

omer s.p.a.


Via Foresto, 42 - 31058 SUSEGANA (TV) ITALY
Tel. 0438 455 318 Fax 0438 455 530
e-mail: omer@omer.it www.omer.it

Tipo di punto
Type of fastener

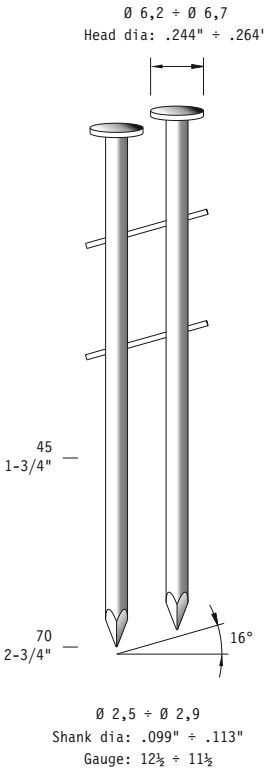


Ref. No.	Part No.	Description
----------	----------	-------------

101	2MCN2970-A101	Hex. Soc. Hd. Bolt
102	2MCN2970-A102	Cap
103	2MCN2970-A103	Grommet
104	2MCN2970-A104	Hex. Soc. Hd. Screw
105	2MCN2970-A105	Guide Cover
106	2MCN2970-A106	Cylinder Cap Seal
107	2MCN2970-A107	Seal
108	2MCN2970-A108	Compression Spring
109	2MCN2970-A109	O-Ring
110	2MCN2970-A110	Washer
111	2MCN2970-A111	Hd.Valve Piston
112	2MCN2970-A112	O-Ring
113	2MCN2970-A113	O-Ring
114	2MCN2970-A114	Driver Unit
115	2MCN2970-A115	Collar
116	2MCN2970-A116	Cylinder
117	2MCN2970-A117	O-Ring
118	2MCN2970-A118	Cylinder Spacer
119	2MCN2970-A119	O-Ring
120	2MCN2970-A120	O-Ring
121	2MCN2970-A121	Bumper-A
122	2MCN2970-A122	Bumper-B
123	2MCN2970-A123	Grommet A
124	2MCN2970-A124	Door Shaft Pin
200	2MCN2970-A200	Trigger Valve Unit
201	2MCN2970-A201	O-Ring
202	2MCN2970-A202	Plunger Cap
203	2MCN2970-A203	O-Ring
204	2MCN3165-A205	O-Ring
205	2MCN2970-A205	Valve Plunger
206	2MCN3165-A206	O-Ring
207	2MCN2970-A207	Spring
208	2MCN2970-A208	O-Ring
209	2MCN2357-A209	Plunger
210	2MCN2970-A210	Trigger Valve Head
211	2MCN2970-A211	Pin
212	2MCN2970-A212	Cover-Plunger
213	2MCN2970-A213	O-Ring
214	2MCN2970-A214	O-Ring
215	2MCN2970-A215	Spring Pin
216	2MCN2970-A216	Secondary Trigger
217	2MCN2970-A217	Trigger
218	2MCN3165-A216	Spring Pin
219	2MCN2970-A219	Spring Pin
301	2MCN2970-A301	Gun Body Unit
302	2MCN2970-A302	O-Ring
303	2MCN2970-A303	End Cap
304	2MCN3165-A304	Dusty Cover
305	2MCN3165-A305	Air Plug
401	2MCN2970-A401	O-Ring
402	2MCN2970-A402	O-Ring
403	2MCN2970-A403	Nose Piece
404	2MCN2970-A404	Hex. Soc. Hd. Bolt
405	2MCN2970-A405	O-Ring
406	2MCN2970-A406	Feed Piston
407	2MCN2970-A407	O-Ring
408	2MCN2970-A408	Feed Bumper
409	2MCN2970-A409	Pusher Spring
410	2MCN2970-A410	Feed Piston Cap
411	2MCN2970-A411	C-Ring
412	2MCN2970-A412	Hex. Soc. Hd. Bolt
413	2MCN2970-A413	Door Latch
414	2MCN2970-A414	Latch Spring
415	2MCN2970-A415	Door
416	2MCN2970-A416	Pu Retainer
417	2MCN3165-A211	Spring Pin
418	2MCN2970-A418	Stopper Finger Sprin
419	2MCN2970-A419	Nail Stop
420	2MCN2970-A420	Pin-Nail Stop
421	2MCN2970-A421	Muzzle Protector
422	2MCN2970-A422	Dust Shield Plug
423	2MCN2970-A423	Safety
424	2MCN2970-A424	Safety Spring
425	2MCN2970-A425	Safety Guide
426	2MCN2970-A426	Magazine Case
427	2MCN2970-A427	Magaeing Post
428	2MCN2970-A428	Rubber Ring
429	2MCN2970-A429	Spring Base
431	2MCN2970-A431	Spacer
432	2MCN2970-A432	Spacer

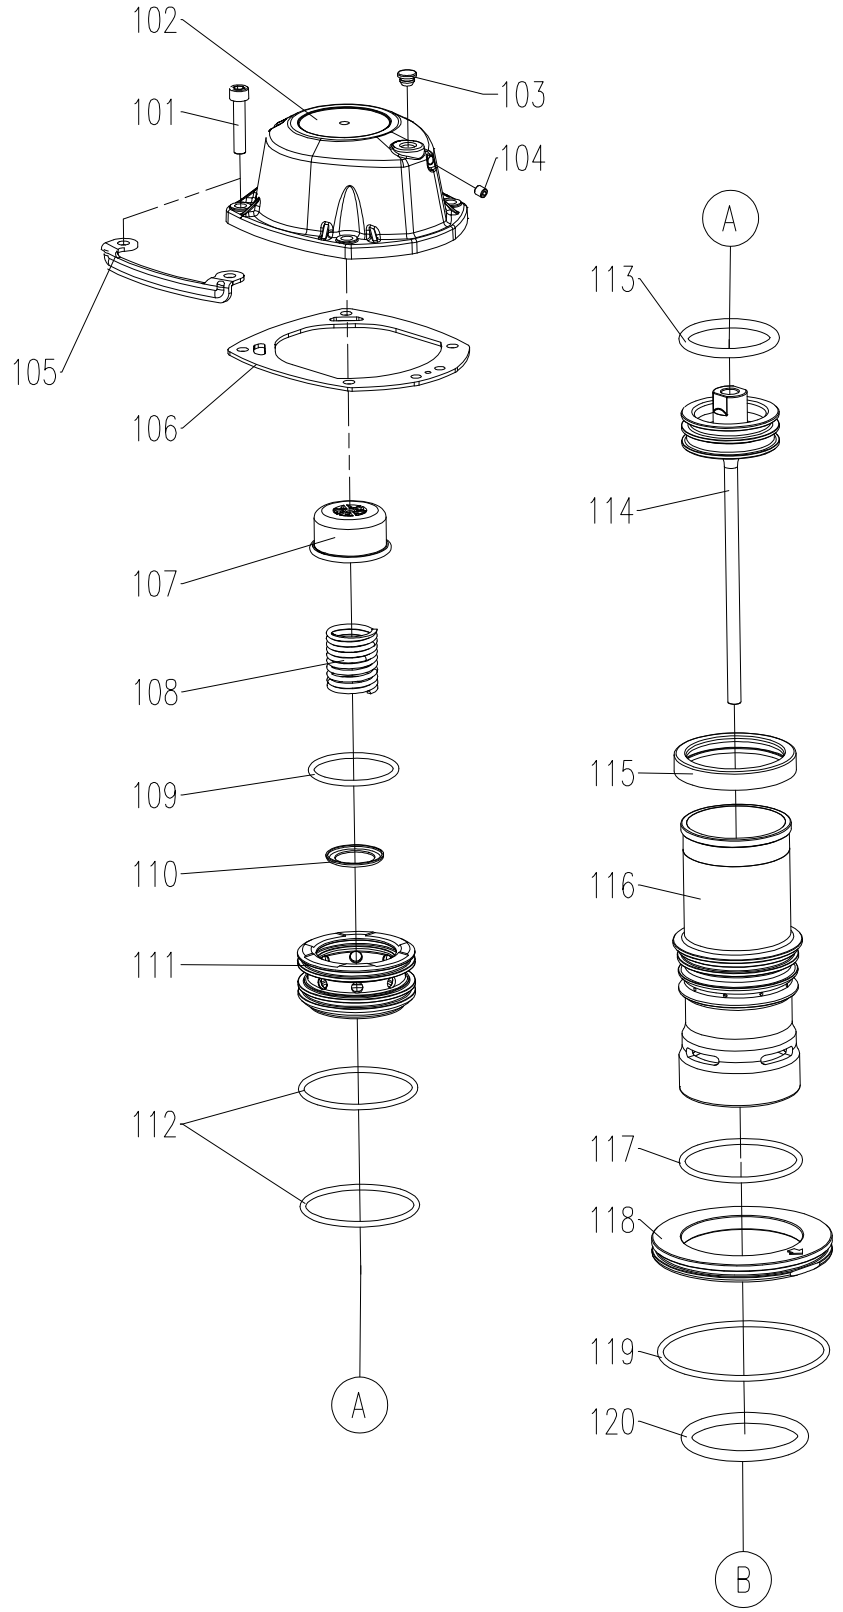

433	2MCN2970-A433	Pull Spring
434	2MCN2970-A434	Magazine Cover
435	2MCN2970-A435	Pin Feed Piston
436	2MCN2970-A436	Feed Finger
437	2MCN2970-A437	Feed Finger Spring
438	2MCN2970-A438	Hex. Soc. Hd. Bolt
439	2MCN2970-A439	Protector Washer
441	2MCN2970-A441	Spring Cover
442	2MCN2970-A442	Bolt Cap
443	2MCN2970-A443	Magazine Shaft Pin

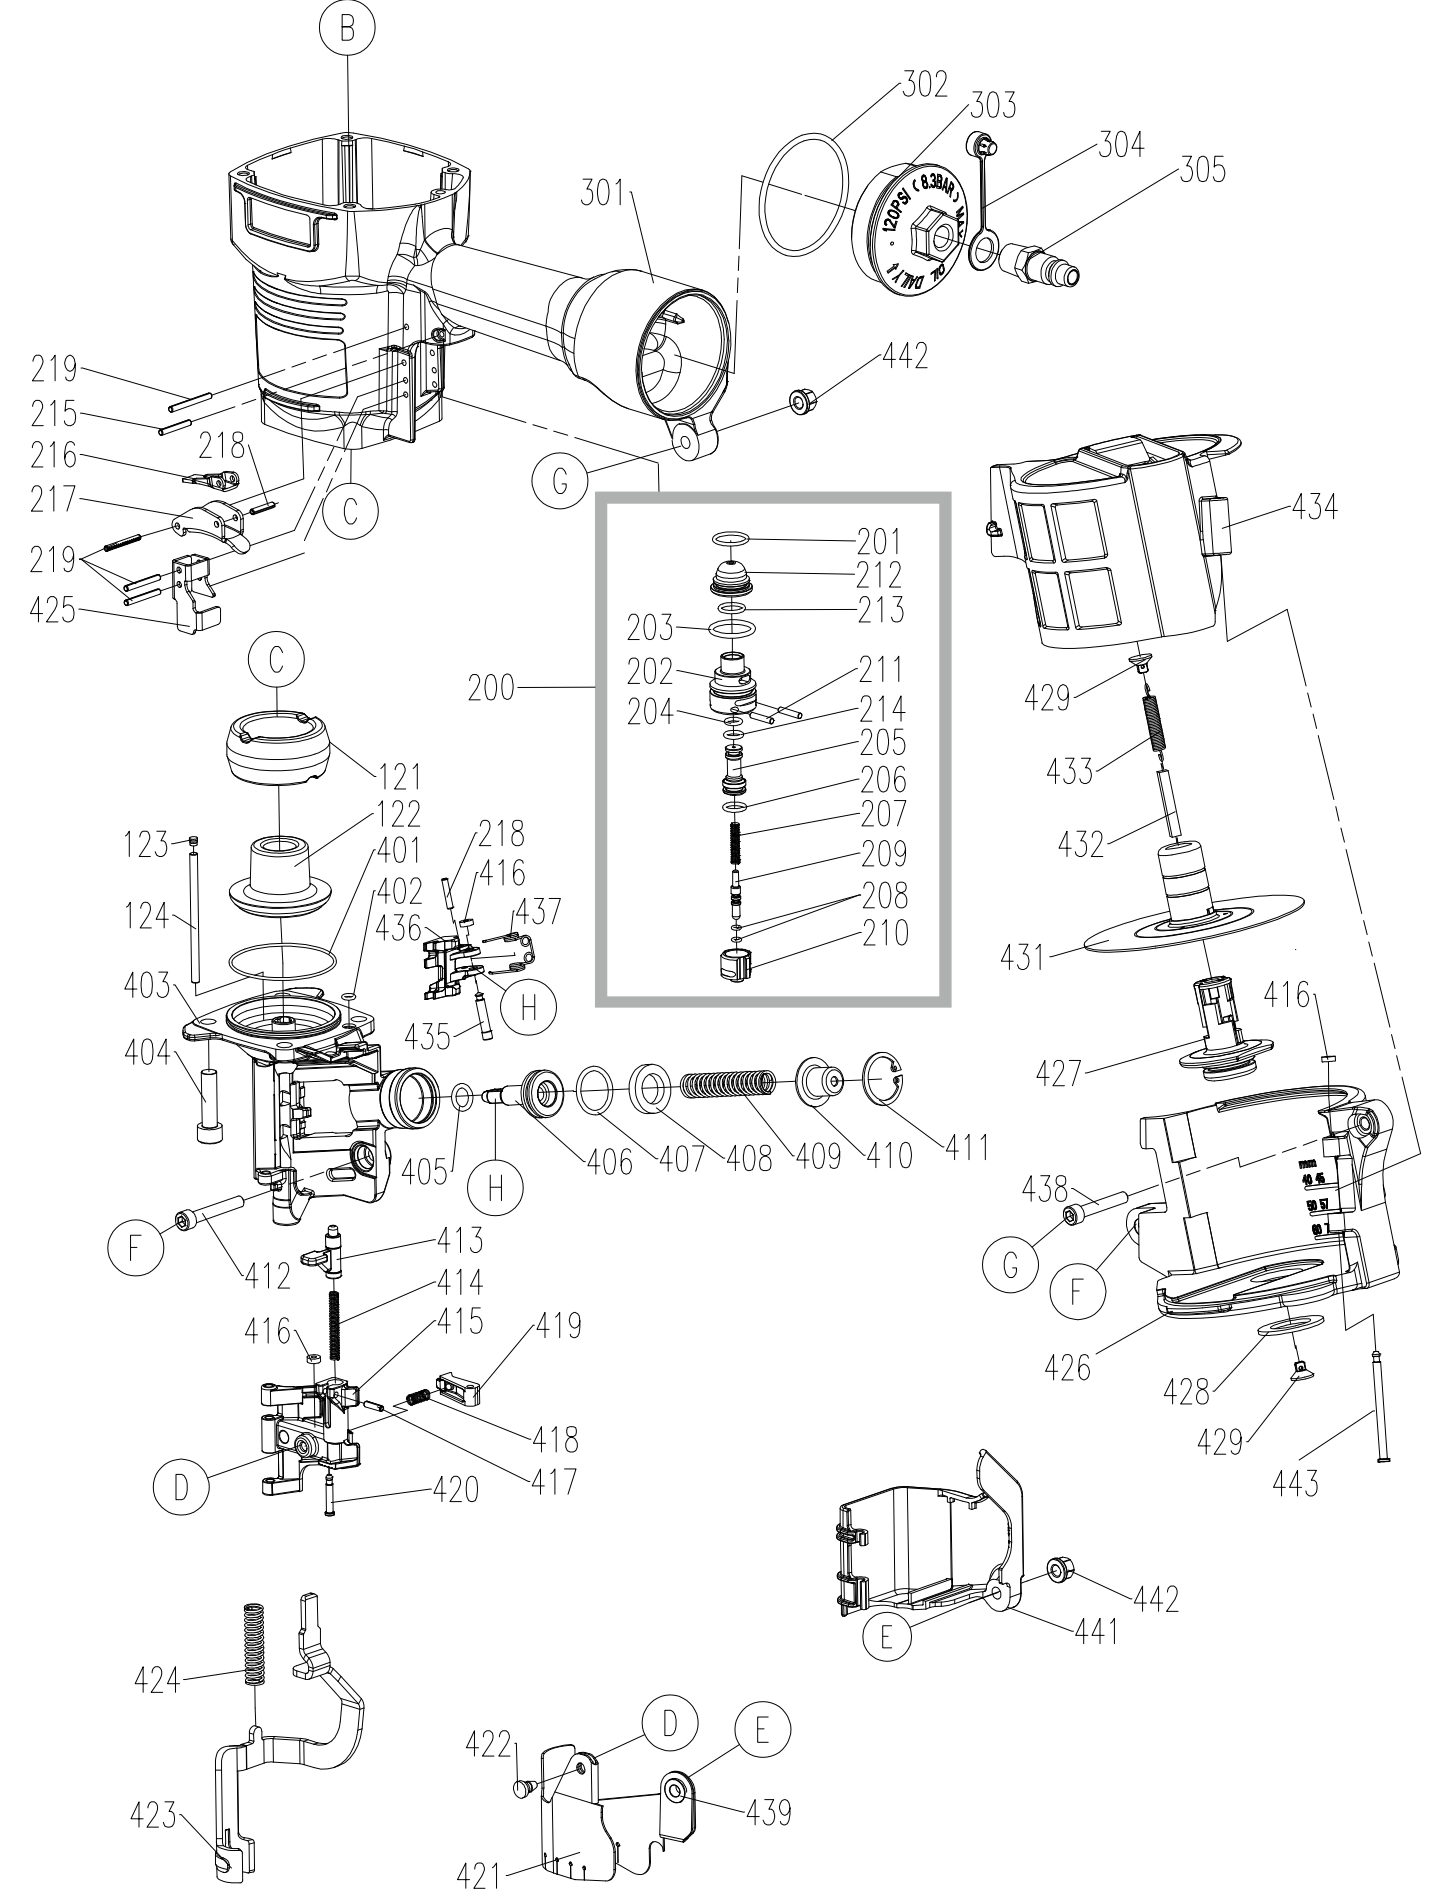

Parti di ricambio - Spare parts

CN29.70

cod. 195MCN2970

Indice di modifica
Upgrade number

A1

04098712